



TC系列接线端子


TC系列接线端子



TC系列接线端子



产品规格

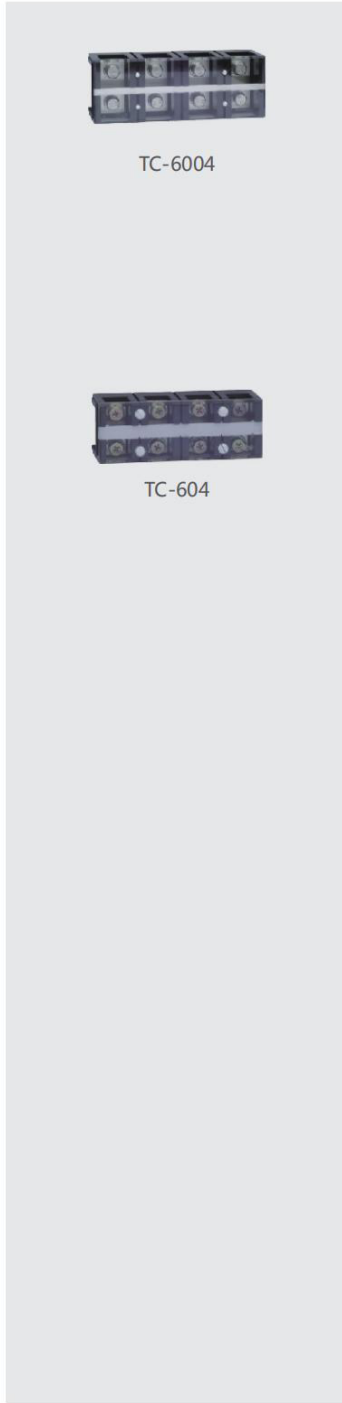

TC-6004

TC-604

TC 系列

1 适用范围


TC适用于交流50Hz或60Hz、额定电压至600V、额定电流至600A的电路中，作导线间的连接之用。本系列产品采用螺钉压接连接，导线端头需压接接线鼻后才能与接线端子连接。采用螺钉安装。

符合标准：GB/T 14048.7、IEC 60947-7-1。




2 外形及安装尺寸

TC系列三组外形及安装尺寸

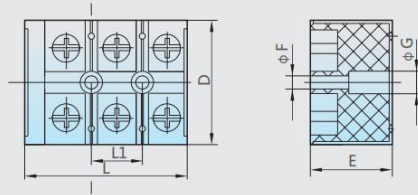


TC系列四组外形及安装尺寸

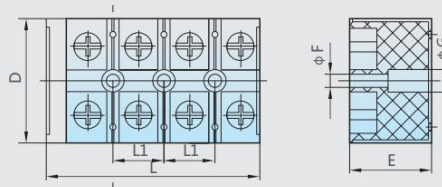

序号	产品型号	额定电流	组数	外形尺寸(mm)						接线螺丝
				L	L1	D	E	F	G	
1	TC-603	60A	3	86	28.5	43	38	5.2	9.6	M6
2	TC-604	60A	4	114.5	28.5	43	38	5.2	9.6	M6
3	TC-1003	100A	3	103	34	55	42	5.2	9.6	M6
4	TC-1004	100A	4	136	34	55	42	5.2	9.6	M6
5	TC-1503	150A	3	115.3	38.5	66	46	6.3	11	M8
6	TC-1504	150A	4	153.5	38.5	66	46	6.3	11	M8
7	TC-2003	200A	3	132	44	72	51	7.9	11.2	M8
8	TC-2004	200A	4	176.5	44	72	51	7.9	11.2	M8
9	TC-3003	300A	3	165.5	55	90	58	7.9	11.2	M10
10	TC-3004	300A	4	219.5	55	90	58	7.9	11.2	M10
11	TC-4003	400A	3	165.5	55	90	60	7.9	11.2	M10
12	TC-4004	400A	4	219.5	55	90	60	7.9	11.2	M10
13	TC-6003	600A	3	206.5	68.5	100.5	80	8.5	12	M12
14	TC-6004	600A	4	275.5	68.5	100.5	80	8.5	12	M12

图片介绍

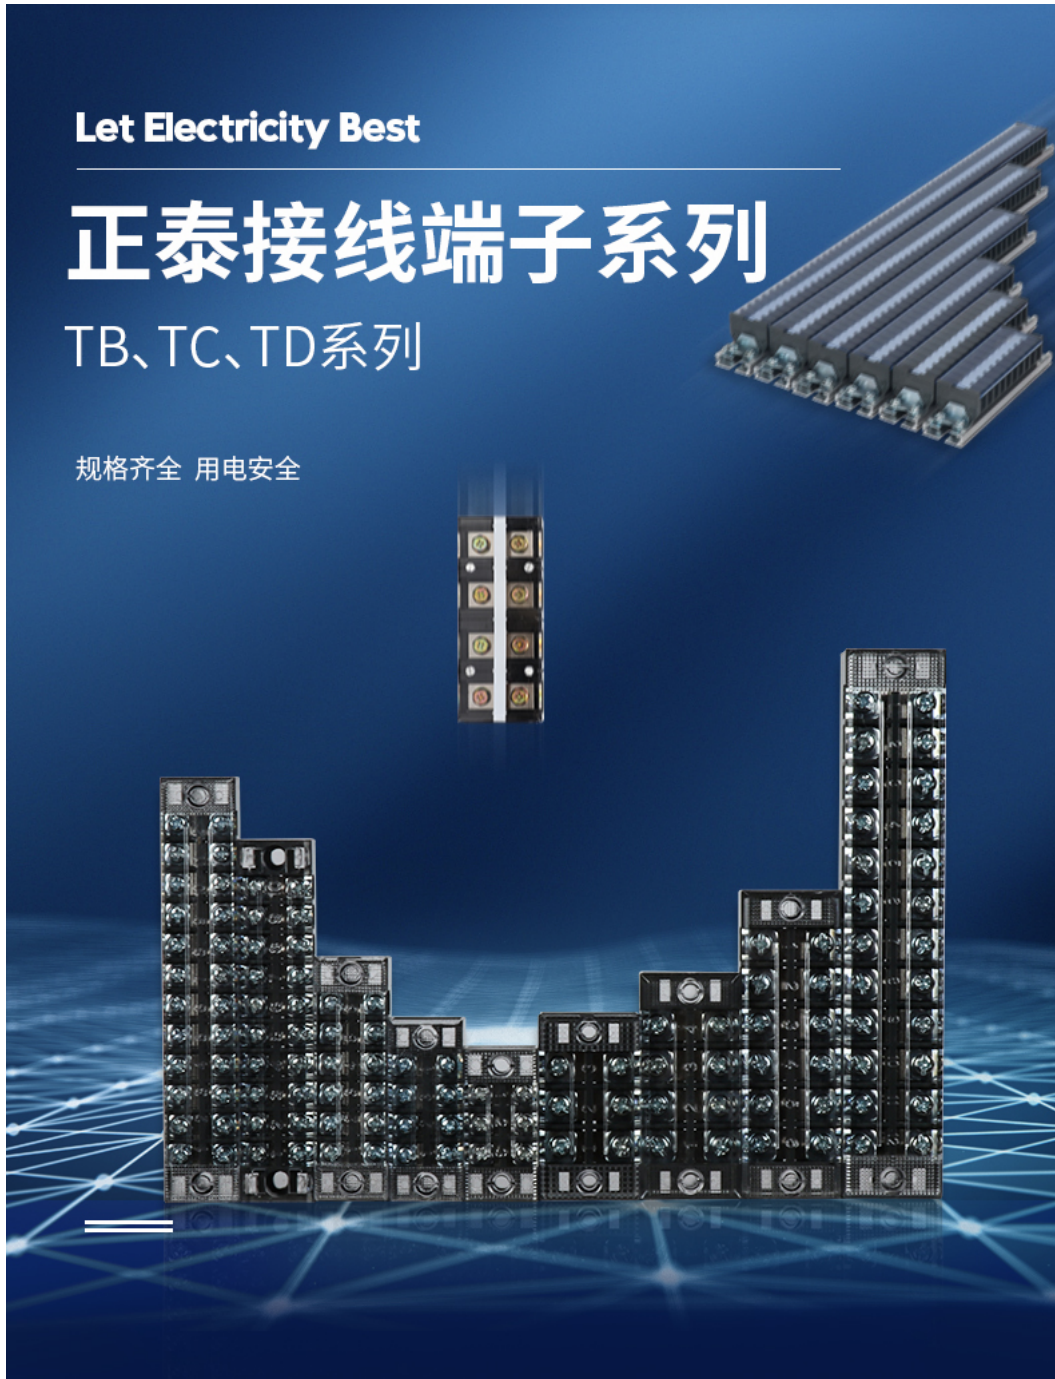

Derived from manual
measurements or instructions


产品尺寸 由人工测量或说明书所得



收到产品尺寸略微有出入
请以实物为准

TB系列尺寸

单位:mm

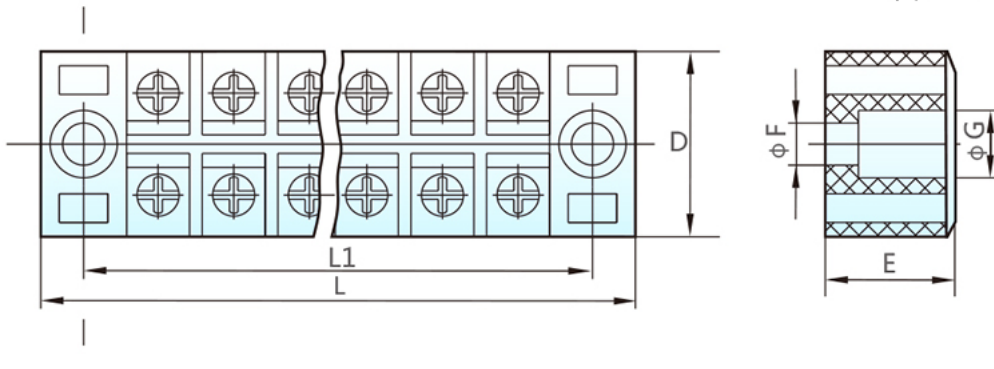

产品 型号	额定 电流	组数	外形尺寸						接线 螺丝	安装 方式
			L	L1	D	E	F	G		
TB-1503	15A	3	45.5	35	22.2	18	4.2	7	M3	螺 丝 固 定
TB-1504	15A	4	54.3	44	22.2	18	4.2	7	M3	
TB-1506	15A	6	72.5	62	22.2	18	4.2	7	M3	
TB-1510	15A	10	107.5	97	22.2	18	4.2	7	M3	
TB-1512	15A	12	126.2	115	22.2	18	4.2	7	M3	
TB-2503	25A	3	55.5	44.6	30.5	20	4.2	7	M4	
TB-2504	25A	4	67.5	56.5	30.5	20	4.2	7	M4	
TB-2506	25A	6	92	81	30.5	20	4.2	7	M4	
TB-2512	25A	12	163.8	152.6	30.5	20	4.2	7	M4	
TB-4503	45A	3	70.5	59.2	38	24	5	7.2	M5	
TB-4504	45A	4	86	75.6	38	24	5	7.2	M5	
TB-4505	45A	5	103	92.5	38	24	5	7.2	M5	
TB-4506	45A	6	119.5	109	38	24	5	7.2	M5	
TB-4512	45A	12	220.5	209.5	38	24	5	7.2	M5	
TB-6003	60A	3	75	63	38	30.5	5	7.2	M6	
TB-6004	60A	4	93	81	38	30.5	5	7.2	M6	
TB-10003	100A	3	86.5	75	43.5	34.5	5	7.2	M6	
TB-10004	100A	4	108.5	97	43.5	34.5	5	7.2	M6	


产品 型号	额定 电流	组数	外形尺寸						接线 螺丝	安装 方式
			L	L1	D	E	F	G		
TB-1503	15A	3	45.5	35	22.2	18	4.2	7	M3	螺 丝 固 定
TB-1504	15A	4	54.3	44	22.2	18	4.2	7	M3	
TB-1506	15A	6	72.5	62	22.2	18	4.2	7	M3	
TB-1510	15A	10	107.5	97	22.2	18	4.2	7	M3	
TB-1512	15A	12	126.2	115	22.2	18	4.2	7	M3	
TB-2503	25A	3	55.5	44.6	30.5	20	4.2	7	M4	
TB-2504	25A	4	67.5	56.5	30.5	20	4.2	7	M4	
TB-2506	25A	6	92	81	30.5	20	4.2	7	M4	
TB-2512	25A	12	163.8	152.6	30.5	20	4.2	7	M4	
TB-4503	45A	3	70.5	59.2	38	24	5	7.2	M5	
TB-4504	45A	4	86	75.6	38	24	5	7.2	M5	
TB-4505	45A	5	103	92.5	38	24	5	7.2	M5	
TB-4506	45A	6	119.5	109	38	24	5	7.2	M5	
TB-4512	45A	12	220.5	209.5	38	24	5	7.2	M5	
TB-6003	60A	3	75	63	38	30.5	5	7.2	M6	
TB-6004	60A	4	93	81	38	30.5	5	7.2	M6	
TB-10003	100A	3	86.5	75	43.5	34.5	5	7.2	M6	
TB-10004	100A	4	108.5	97	43.5	34.5	5	7.2	M6	

TC系列尺寸

单位:mm


三组外形及安装尺寸

TC接线端子

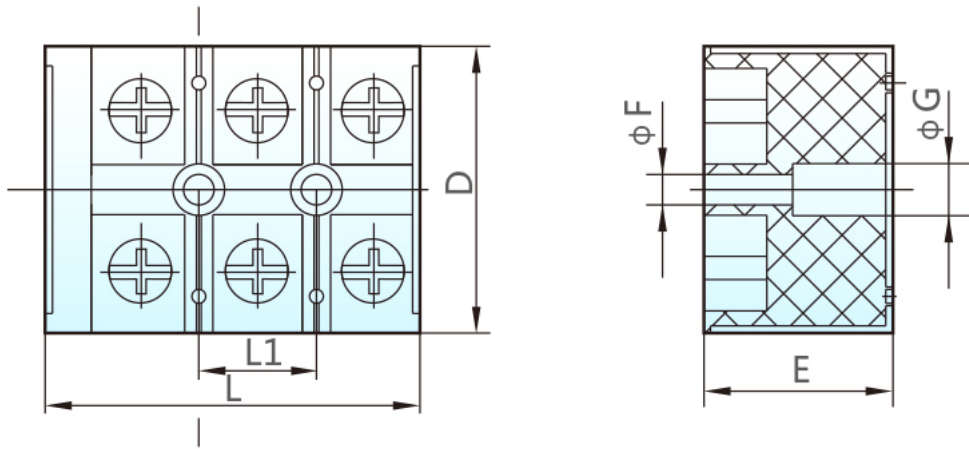


四组外形及安装尺寸

TC接线端子

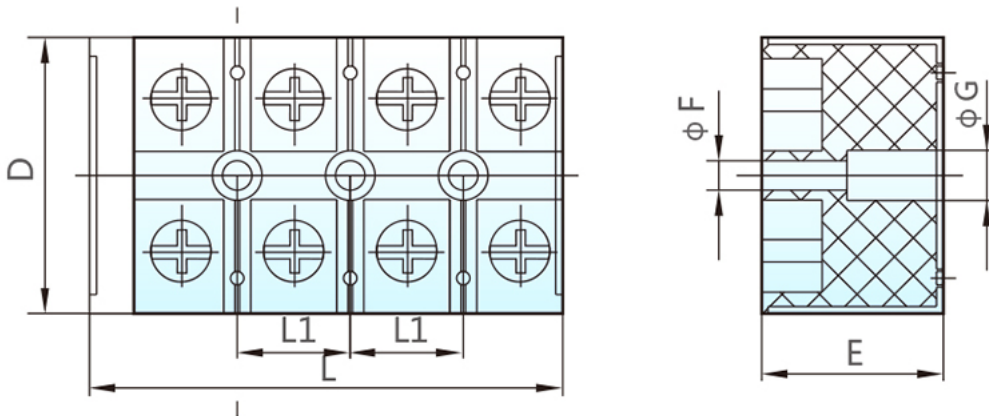

产品型号	额定电流	组数	外形尺寸						接线螺丝
			L	L1	D	E	F	G	
TC-603	60A	3	86	28.5	43	38	5.2	9.6	M6
TC-604	60A	4	114.5	28.5	43	38	5.2	9.6	M6
TC-1003	100A	3	103	34	55	42	5.2	9.6	M6
TC-1004	100A	4	136	34	55	42	5.2	9.6	M6
TC-1503	150A	3	115.3	38.5	66	46	6.3	11	M8
TC-1504	150A	4	153.5	38.5	66	46	6.3	11	M8
TC-2003	200A	3	132	44	72	51	7.9	11.2	M8
TC-2004	200A	4	176.5	44	72	51	7.9	11.2	M8
TC-3003	300A	3	165.5	55	90	58	7.9	11.2	M10
TC-3004	300A	4	219.5	55	90	58	7.9	11.2	M10
TC-4003	400A	3	165.5	55	90	60	7.9	11.2	M10
TC-4004	400A	4	219.5	55	90	60	7.9	11.2	M10
TC-6003	600A	3	206.5	68.5	100.5	80	8.5	12	M12
TC-6004	600A	4	275.5	68.5	100.5	80	8.5	12	M12

TD系列尺寸

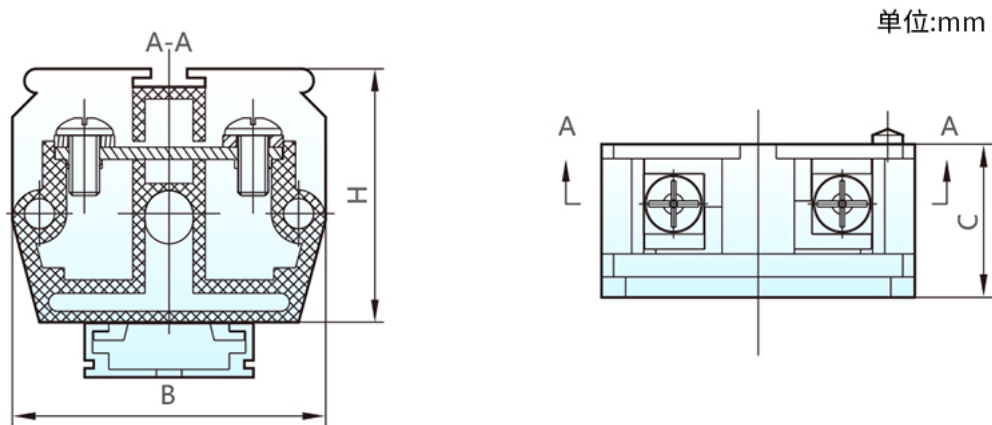

产品型号	外形尺寸			安装轨型式
	B	C	H	
TD-15	30	8.1	20	C
TD-20	39	11.7	28.7	C
TD-30	43	14.3	34	C
TD-60	52	18.2	42	C



产品展示

Please
Photographs of products



